

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
14 April 2005 (14.04.2005)

PCT

(10) International Publication Number  
**WO 2005/033524 A1**

(51) International Patent Classification: **F16B 2/10**,  
B25B 5/04, 5/10, F16M 13/02

(21) International Application Number:  
PCT/AU2004/001345

(22) International Filing Date: 1 October 2004 (01.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2003905393 3 October 2003 (03.10.2003) AU

(71) Applicant (for all designated States except US): MI-  
CRONIX PTY LTD [AU/AU]; Level 1, 153 Greenhill  
Road, Parkside, South Australia 5063 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DICKISON,

Maxwell [AU/AU]; 68 Wyatt Street, Adelaide, S.A. 5000  
(AU). KEARNEY, Tony, Damien [AU/AU]; 68 Wyatt  
Street, Adelaide, S.A. 5000 (AU).


(74) Agent: MADDERN; 1st Floor, 64 Hindmarsh Square,  
Adelaide, S.A. 5000 (AU).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: UNIVERSAL EQUIPMENT CLAMP

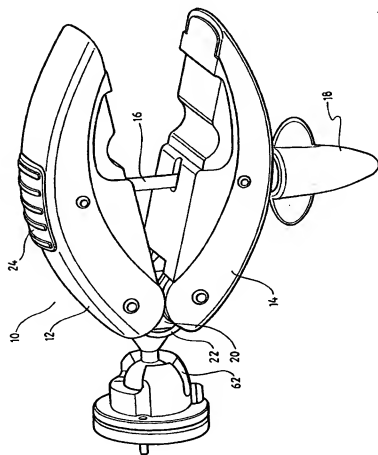

(57) Abstract: Clamp (10) includes two opposing jaws (12, 14) pivotally engaged at adjacent ends, spring (22) arranged to provide an opening bias to separate the free ends of jaws (12, 14) and at least one threaded rod (16) extending between jaws (12, 14). Rod (16) is pivotally engaged to one of the jaws intermediate its ends and passes through the other jaw. A threaded portion on the free end of rod (16) cooperates with stop (18) so as to enable adjustment of the separation between the free ends of jaws (12, 14) against the bias of spring (22). Clamp (10) may include a ball type pivotal connection (62) and is capable of being attached to supporting members of variable shape, orientation and cross-sectional area.

WO 2005/033524 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— with international search report